

AK-2308



Intel core i7-8750H



CPU	Intel Core i7 8750H 2.20GHz-4.10GHz		
Cores/Threads	6 Cores / 12 Threads		
Cache	9 MB Intel® Smart Cache		
TDP	35W-45W		
Chipset	Products formerly Coffee Lake		
RAM	2*SO-DIMM DDR4L, max support 32GB		
Storage	SSD (M.2 SATA)		
	Optional HDD(support 2.5-inch hard disk)		
Audio Card	HD Audio realtek ALC269		
Graphic Card	Intel UHD Graphics 630		
Network Card	10/100/1000Mbps Adaptive RTL 8111H		
Extendable	WIFI+Bluetooth Module、 3/4G Module		
OS supported	Windows (Not include XP) & Linux		
External I/O	2*USB2.0、 4*USB3.0、 1*LAN、 1*VGA、 1*HDMI、 1*MIC-IN、 1*LINE-OUT、 1*DC 12V		
BIOS Function			
Display	HDMI/VGA VGA max resolution: 1920*1080@60Hz; HDMI max resolution: 4096*2304@30HZ;		
Booting Method	PXE / Auto-power-on / Wake-on-LAN / USB-wake-up-S1		
Intel VT-x	Support		
Hyper-threading	Support		
Working Environment	Environment Temperature: 0~60 °C		Relative humidity: 0~95%(No condensation)
Working Voltage	DC 12V - 7A		
Static Electricity	Contact discharge 2K, air discharge 6K		
Conditons	Environment Temperature: -20~75 °C		Relative humidity: 0~95% (No condensation)

AK-2308

Intel core i7-8750H

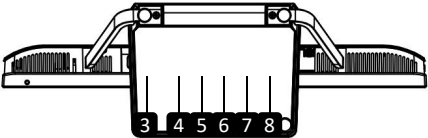

Display Type	LCD Module , a-Si TFT-LCD
Screen Ratio	16: 09
Screen Resolution	1920*1080
Brightness	250 cd/m²
Contrast Ratio	1000:1
Viewing Angle	89/89/89/89
Refresh Screen	60Hz

Specification

Cooling Method	Active cooling		
Installation method	Standing Base		
Packaging	Kraft paper color box + foam + anti-fall corrugated outer box		
Weight	Net Weight:	4kg	Gross Weight: 5.5kg
Packing List	Power supply * 1	Power cable * 1	
	Manual * 1	Certificate * 1	

Specification

01	POWER ON / OFF	02	USB2.0*2	03	DC 12V
04	USB3.0*4	05	HDMI	06	VGA
07	RJ45 Gigabit LAN	08	SPK Output+MIC Input		

I/O Port

Extension ports	Camera*1
-----------------	----------