



1 K8-F17HI-N3710



CPU	Intel® Pentium 3710 1.6GHz~2.56GHz	
Cores/Threads	4 Cores / 4 Threads	
Cache	2MB L2 Cache	
TDP	6W	
Architecture	Broadwell	
Memory	SO-DIMM DDR3 slot x 1, max support 8G	
Storage	SSD (M.2 M KEY 2280 SATA)	
	Support 2.5-inch HDD expansion	
Audio Card	HD Audio realtek ALC 897	
Graphics	Intel® HD Graphics	
Network	10/100/1000BASE-T Ethernet (RJ45) x 1, Realtek 8111H	
Extendable	M.2 E KEY 2230 socket x 1, support WIFI+ Bluetooth; Mini PCIE x 1, support 4G module (with SIM card slot)	
OS Support	Windows 7, Windows 10, Linux	
I/O Ports	USB3.0 x 2, USB2.0 x 4, HDMI 1.4 x 1, VGA x 1, LAN x 1, RJ11 x 1, PS/2 Combo Port x 1, DC-IN 12V x 1, 3.5mm Audio Combo (Out + In) x 1, DB-9 RS-232 (485)(0/5/9/12V switch) x 2, DB-9 RS-232 x 2, BIOS Reset Button x 1, 2 - pin Power Terminal x 1.	
Built-in Socket	COM signal switch pin x 2, COM voltage switch pin x 2, F-PANEL x 1, PCIE GPIO x 1, CPU-FAN x 1, TPM Pin x 1, SATA HDD (SATA III) x 1, SPEAKER(4pin) x 1, SIM card slot x 1, CMOS x 1, AT_MODE(AUTO_PWR) x 1, LVDS x 1, USB2.0 x 1.	
Display Mode	Support Dual display (HDMI 1.4 +VGA) Copy Mode or Extended Mode, Max Resolution (HDMI 1.4): 4096 x 2304@30Hz; Max Resolution (VGA): 1920 x 1080@60Hz.	
Boot Mode	AC Power Recovery, UEFI PXE Boot, Wake-on-LAN, Scheduled Power On/Off	
Intel Virtualization	Support VT-x, Not Support VT-d	
Intel Hyper-Threading	Support	
Working Environment	Temperature : -10~60	Relative Humidity: 0~95% (No Condensation)
Working Voltage	DC 12V - 3A	
Static Electricity	Contact discharge 2K, Air discharge 6K	
Storage Environment	Temperature : -10~60	Relative Humidity: 0~95% (No Condensation)

BIOS Function

2 K8-F17HI-N3710

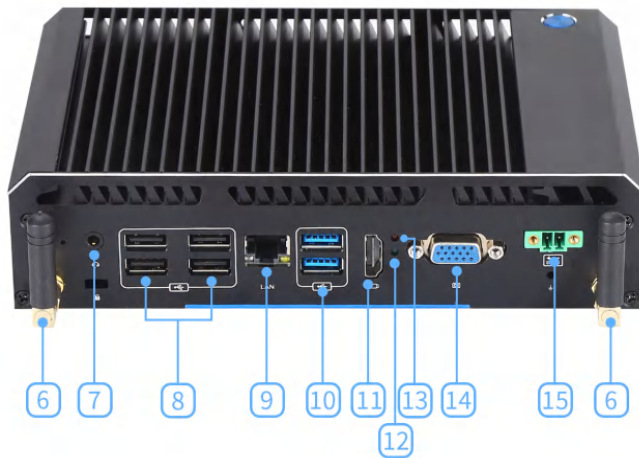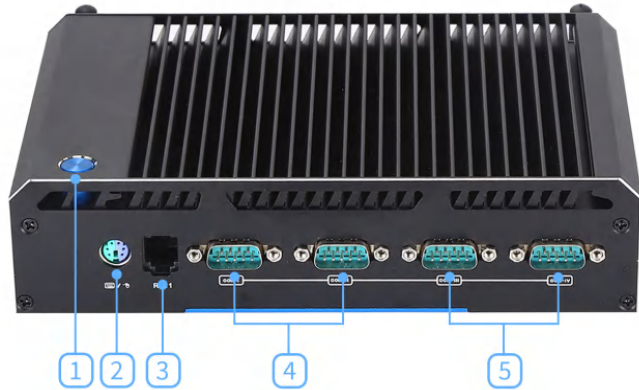

01 Power Button	02 PS/2 Combo Port	03 RJ11
04 DB-9 RS-232 (485)(0/5/9/12V) X 2	05 DB-9 RS-232 x 2	06 Wi-Fi Antenna
07 3.5mm Audio Combo (Out + In)	08 USB2.0 x 4	09 LAN
10 USB3.0 x 2	11 HDMI 1.4	12 Power LED
13 HDD LED	14 VGA	15 2 - pin Power Terminal

Size L 197.4mm x W 126.3mm x H 47.5mm

Machine Weight 1.0KG

Gross Weight 1.8KG

Others

Features Aluminum alloy, patented compact design, 7 x 24 operation support

Heat Dissipation Passive cooling (natural heat dissipation)

Bracket Dedicated Bracket; Support VESA Bracket, Optional Ear Mount / DIN Bracket

Packing Box Kraft Paper Box and Anti-Shock Corrugated Carton

Packing List	Machine x 1	Power Cable x 1	Power Adapter x 1	Screws Bag x 1
	QA Card x 1	User Manual x 1	VESA Bracket x 1	

Internal Part Number K970-N3710-F17H-J